


Flexible UHF Metal Tag

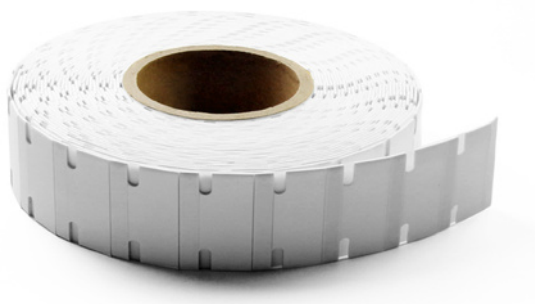


Functional Specifications:

RFID Protocol:	EPC Class1 Gen2, ISO18000-6C
Frequency:	(US) 902-928MHZ, (EU)865-868MHZ
IC type:	Impinj Monza R6-P
Memory:	EPC128bits , User 64bits, TID96bits
Write Cycles:	100,000 Times
Functionality:	Read/write
Data Retention:	50 Years
Applicable Surface:	Metal Surfaces
Read Range : (Fix Reader)	1.5m, On metal
Read Range : (Handheld Reader)	1.0m, On metal
Warranty:	1 Year


Physical Specification:

Size:	45.0x8.0mm
Thickness:	1.0mm
Material:	Foam
Colour:	White (Customizable color printing)
Mounting Methods:	Adhesive
Weight:	0.9g
Recommended Printer:	Zebra R110Xi4 / Postek TX3R / SATO CL4NX

Dimensions:



JFLE4508 (On metal) :

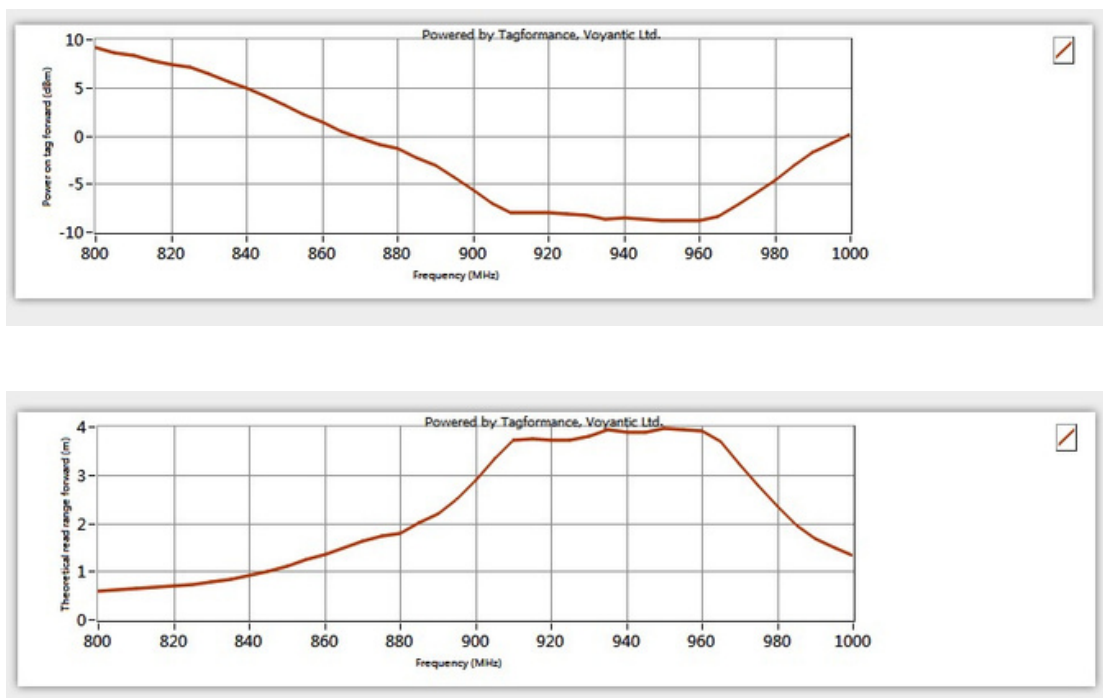

Environmental Specification:

IP	Rating:	IP57
Temperature:		-20 ~ 85°C
Certifications:		Reach Approved, RoHS Approved, CE Approved